

RX


MOTOR PROTECTION / OVERLOAD RELAY 200 - 15,000VAC, 1 through 2000A



RX for a Healthy Motor!

- "Thermal Model" Motor Protection
- True Motor Power Monitoring
- Voltage, Current and Power Metering
- Flexible Control Features
- Optional Ground Fault Plug
- Dry Pump Protection
- Remote Monitoring optional

Green Energy Management

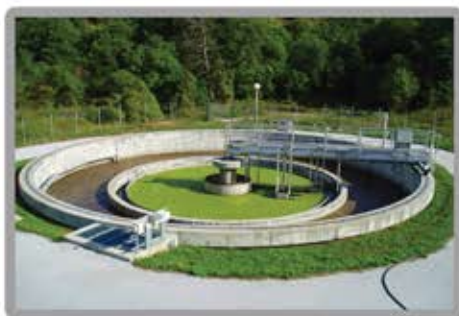

RX Series for Maximum Motor Protection

Motor Protection

Take your motor protection to a new level. The RX Series provides more than just solid state overload or power protection relays. By using features previously found only in large expensive Motor Protection Relays, the RX Series allows even small to medium sized motor applications to be protected by the best technology available, yet at a price affordable to all.

Easy to read and simple to use, the RX Series display shows more than just “trip indication”.



- 4 digit bright display shows values up to 9999
- LED indicators to show what the display is reading
- Status LEDs for Trip and Relay operations
- Large keypad, no dip switches or rotary dials that may require tools
- Passcode protection can keep out unwanted changes

NEMA 4 Operator Interface can be remote mounted up to 6 feet away.

Advanced Metering and Communication

Advanced Technology for Maximum Motor and System Protection

The RX Series uses Thermal Modeling software normally found only in the most sophisticated Motor Protection Relays. This software keeps track of power related issues occurring in the motor circuit that contribute to causing a thermal overload. If there is a power loss, a unique combination of non-volatile memory and a real-time clock ensure that this protection is in effect when power is restored. Should an overload occur, the RX Series is intelligent enough to make sure that it can only be reset when the motor is sufficiently cooled down and is ready to start again successfully. Voltage input features allow true Motor Load Monitoring, not just current, along with Power Factor, kVA and Frequency.

Built-in Flexible Control Features Provide Cost and Space Savings

A 24 hour / 7 day Real Time Clock on board allows for several additional features that can eliminate the need for other discrete devices. Duty cycle can be controlled by using the Starts/Hour and Minimum Time Between Starts features, plus a Coast-Down / Backspin timer can prevent restarting while a motor is spinning backwards. In addition, simple Batch Time processes of up to 7 events can be programmed for daily, multi-day or weekly operations without the need for an external time clock. A Restart Delay timer allows staggered restarting of multiple units as well.

Add Metering and Communications to New or Existing Starters

Metering for Three Phase Currents, Voltages, kW, kVA, kVAR, Power Factor, Frequency, kWh, Elapsed Run Time, Run Cycle Count, Lock-Out Time, Reset Time and Remaining Thermal Capacity are all included, and can be both read on the display and communicated via the built-in RS-485 Modbus RTU comm. Port. Optional converters allow communications via DeviceNet, Field Bus, Profibus and other protocols as well. Fault memory with time and date stamps helps in troubleshooting and returning to operation. Great for remote monitoring.



Protect your 3-Phase Motor from:

- ✓ Line power problems; Single Phasing
- ✓ Phase Reversal, Voltage Imbalance
- ✓ Thermal Overload (i²t), Class 5-30
- ✓ Equipment Ground Fault
- ✓ Current Imbalance
- ✓ Jammed Load / Locked Rotor
- ✓ Broken shaft / belt / loss of prime
- ✓ Over / Under Voltage
- ✓ Low / High Power Factor
- ✓ Short Cycling, Too Many Starts per Hour
- ✓ Back-Spin Restart Lockout
- ✓ Excessive Run Time
- ✓ Acceleration / Incomplete Sequence
- ✓ Over / Under Frequency from a Generator



RX Series for Maximum Motor Protection

Motor Protection

Take your motor protection to a new level. The RX Series provides more than just solid state overload or power protection relays. By using features previously found only in large expensive Motor Protection Relays, the RX Series allows even small to medium sized motor applications to be protected by the best technology available, yet at a price affordable to all.

Easy to read and simple to use, the RX Series display shows more than just “trip indication”.



- 4 digit bright display shows values up to 9999
- LED indicators to show what the display is reading
- Status LEDs for Trip and Relay operations
- Large keypad, no dip switches or rotary dials that may require tools
- Passcode protection can keep out unwanted changes

NEMA 4 Operator Interface can be remote mounted up to 6 feet away.



Advanced Metering and Communication

Advanced Technology for Maximum Motor and System Protection

The RX Series uses Thermal Modeling software normally found only in the most sophisticated Motor Protection Relays. This software keeps track of power related issues occurring in the motor circuit that contribute to causing a thermal overload. If there is a power loss, a unique combination of non-volatile memory and a real-time clock ensure that this protection is in effect when power is restored. Should an overload occur, the RX Series is intelligent enough to make sure that it can only be reset when the motor is sufficiently cooled down and is ready to start again successfully. Voltage input features allow true Motor Load Monitoring, not just current, along with Power Factor, kVA and Frequency.

Built-in Flexible Control Features Provide Cost and Space Savings

A 24 hour / 7 day Real Time Clock on board allows for several additional features that can eliminate the need for other discrete devices. Duty cycle can be controlled by using the Starts/Hour and Minimum Time Between Starts features, plus a Coast-Down / Backspin timer can prevent restarting while a motor is spinning backwards. In addition, simple Batch Time processes of up to 7 events can be programmed for daily, multi-day or weekly operations without the need for an external time clock. A Restart Delay timer allows staggered restarting of multiple units as well.

Add Metering and Communications to New or Existing Starters

Metering for Three Phase Currents, Voltages, kW, kVA, kVAR, Power Factor, Frequency, kWh, Elapsed Run Time, Run Cycle Count, Lock-Out Time, Reset Time and Remaining Thermal Capacity are all included, and can be both read on the display and communicated via the built-in RS-485 Modbus RTU comm. Port. Optional converters allow communications via DeviceNet, Field Bus, Profibus and other protocols as well. Fault memory with time and date stamps helps in troubleshooting and returning to operation. Great for remote monitoring.



Protect your 3-Phase Motor from:

- ✓ Line power problems; Single Phasing
- ✓ Phase Reversal, Voltage Imbalance
- ✓ Thermal Overload (i²t), Class 5-30
- ✓ Equipment Ground Fault
- ✓ Current Imbalance
- ✓ Jammed Load / Locked Rotor
- ✓ Broken shaft / belt / loss of prime
- ✓ Over / Under Voltage
- ✓ Low / High Power Factor
- ✓ Short Cycling, Too Many Starts per Hour
- ✓ Back-Spin Restart Lockout
- ✓ Excessive Run Time
- ✓ Acceleration / Incomplete Sequence
- ✓ Over / Under Frequency from a Generator



“Thermal Model” Motor Protection

Specifications

Type of Load

3 Phase AC induction motors

Ambient Conditions

0 to 50°C, 0 to 90% relative humidity
Up to 10,000' elevation (3000m) w/o derating

LED Alphanumeric Display

High brightness 7-segment display can be seen in high ambient light conditions.
4 digit display allows display of high values

Power Wiring

Feed through or external CT lead feed-through

AC Supply Voltage (Motor Voltage)

Direct: 200-600VAC, +/- 10% 50/60Hz
With 120V PTs: 690-15,000VAC

Service Factor (for NEMA design motors)
1.00-1.30

LED Status Lights

10 LED indicators on the front panel give relay status or quick reference for the alphanumeric display.

Packaging

Open panel mount with DIN rail clips (IP00)

Current Ranges

1-2000 Amps

Current Measurement

2 window CTs on units up to 5A
External CTs for larger ranges
Meets NEC requirements for leg protection

Full Function Keypad

4 quadrant navigation keys provide easy access to status information and programmable functions.

Operator interface

Built-in, or remote mount up to 6ft (1.8m) away

CONTROL SYSTEM

Control Voltage

Universal control voltage supply
85-265VAC or DC, 50/60Hz

Programmable Output Contacts:

1 Form C (SPDT) 5A, 240VAC max., +
1 Form A (SPST) 10A max. 1/2HP @240VAC
33 programmable functions

1 Multi-function Digital Input

Dry contact input for Timer Start, Remote Start, Remote Trip.

Fault Reset

Manual button on display, or
Cycle control power for remote reset

PROTECTION SYSTEM DESIGN AND ADJUSTMENTS

Overload Protection Method

Real-time Motor Thermal Modeling uses current sensors and microprocessor to continuously calculate motor temperature.

Learned Dynamic Reset

Overload Trip will not reset unless motor has regained enough thermal capacity based on learned motor starting profiles.

Phase Loss/Sequence Protection

Trips on any phase under 20% of Voltage.
Sequence selectable A-B-C, C-A-B or Off

Over Voltage Trip

Any phase voltage over trip level
Off or 1-10% of set voltage, w/1-20 sec. delay

Load Monitor (True Motor Power)

Under or Over kW trip or alarm
Off, or 20-100% motor kW, w/1-20 sec. delay

Equipment Ground Fault Protection

Electronic Residual current protection method, no additional CTs needed
Setting: Off, 5-90% of CT w/1-60 sec. delay

Retentive Thermal Memory

Remembers the thermal condition of the motor even if control power is lost. Thermal Register is adjusted for Off-Time when power is resumed.

Programmable Service Factor

Service Factor setting automatically adjusts other settings to compensate.
Adjustment Range: 1.0-1.15 SF

Over-Current Trip

Electronic Shear-Pin / Shock Relay
Setting: Off or 50-300% FLA w/1-20 sec. delay

Under Voltage Trip on Startup

Off, or 1-30% of set voltage
1-180 second startup time

Power Factor Monitor

Leading or Lagging PF, trip or alarm
Off, or 0.01-1.00, lead or Lag w/1-20 sec. delay

Short Circuit / Shorted Load

Peak Current quick trip (electronic fuse)
Trip level: Off or 800-1400% FLA, with .1-.5 sec. delay

Dual Overload Curve Settings for RV start

Start Curve can be set to Class 5-30
Run Curve can be set to Class 5-30
Automatic Full Speed detection and change over

Current Imbalance Protection

Provides monitoring of phase-to-phase current levels and trips if imbalance exceeds setting.
Setting: Off or 1-30% FLA w/1-20 sec. delay

Under-Current Trip

Load-Loss /Loss of Prime protection
Setting: Of or 10-90% FLA w/1-60 sec. delay

Under Voltage Trip at Full Speed

Off, or 1-30% of set voltage
1-20 second trip delay

Frequency Monitor

Over or Under programmed frequency
Trip Setting: Off, or 1-10Hz, w/1-20 sec. delay

Restart Delay Timer

Programmable delay for restarting after a power failure for use in multiple installations.
Setting: 0-999 sec.

True Motor Power Monitoring

Specifications (Continued)

PROTECTION SYSTEM DESIGN AND ADJUSTMENTS

Starts-per-Hour Lockout

Programmable maximum starts-per-hour to prevent exceeding motor limits.
Setting: Off or 0-10 start / Hr

Minimum Time Between Starts

Used with or without Start-per-Hour protection to prevent short cycling of motor
Setting: Off or 1-60 minutes between starts

Coast-Down Timer

Back Spin or Anti-Wind Milling protection
Prevents Restart after Stop Command
Time Setting: Off or 1-60 min.

METERING AND DISPLAY SPECIFICATIONS

Amp Meter for Each Phase

Default is Phase A
Scroll up or down for Phases B, C and Ground
0-9999A (999A for Ground), +/- 2% accuracy

Elapsed Time Meter

Running time from At-Speed detection.
Non-Resettable except with password
0-9,999,999.9 hours

Run Cycle Counter

Counts starts (At-Speed) for maintenance
Non-Resettable except with password
0-99,999,999 counts

Volt Meter for Each Phase

0-600V, or 1-15kV, +/- 2% accuracy
Total Voltage Imbalance %

Power Metering

kW, kWhr, kVA, kVAR, or MW, MWhr, MVA, MVAR. 0-9999 units +/- 2% accuracy

Power Factor Metering

Leading (Inductive) or lagging (capacitive)
0.01-1.00 PF

Fault Display

Alpha abbreviated English display
Shows fault code plus 10 LEDs indicate phase and trip status

Fault Event Recorder

Records previous 3 fault trips
Shown on display and stored in non-volatile memory

Time and Date Stamps

Fault history stored with time and date stamps from Real Time Clock. Can be cleared with password protection.

Thermal Capacity Meter

Real-time display of Remaining Thermal Capacity of motor after starting or running
0-100%, counts up while cooling

Remaining Time Value Displays

View values of lockout timers such as Time Between Starts or Coast-Down,
View process timer or time clock values

Remote Display Mounting

Display is built-into front of unit
Can be remotely mounted up to 10ft. away
NEMA 12 display membrane kit available



RX Series

Note: The RX is not suitable for use with variable frequency drives.

CORPORATE HEADQUARTERS

Motortronics / Phasetronics

1600 Sunshine Drive
Clearwater, Florida 33765
Tel: + 727-573-1819 / 888-767-7792
Fax: + 727-573-1803 / 800-548-4104
E-mail: sales@motortronics.com
www.motortronics.com

INTERNATIONAL LOCATIONS

Fairford Electronics Ltd.

Part of the Motortronics Group
Bristow House,
Gillard Way, Ivybridge,
Devon, PL21 9GG,
United Kingdom
Tel: +44 (0)1752-894554
www.fairford.com

Motortronics Int'l Korea Co Ltd
601, Daeryung Techno Tower 5-cha
Gasan-dong, Geumcheon-gu
Seoul, Korea 9153-774
Tel: 82-2-867-5808
Fax: 82-2-867-6004
www.motortronics-korea.com



MOTORTRONICS™

Solid State AC Motor Control

M & P Machinery & Electronics Control
Part of the Motortronics Group
32 Jiaxin Road, Jimo
Qingdao, China 266229
Tel: 86-532-81725028
Fax: 86-532-81725038
www.mp-cn.com

PN: RX-100518