

The ILW Performance Level 'd'/SIL2 series of GEFRA are pressure transmitters for using in high temperature environment with IO-Link output.

The main characteristic of this series is the capability to read temperature of the media up to 315°C (600°F).

The constructive principle is based on the hydraulic transmission of the pressure.

The fluid-filled system assures the temperature stability.

This "Smart" transmitter with IO-Link output is ready for "Industry 4.0" requirements.

"ILW" is GEFRA's series of high-temperature pressure sensors with filling fluid and digital output.

This new series ILW with "IO-Link" interface is a Smart device specifically designed to meet the requirements of "Industry 4.0" environment, with auxiliary information suitable to prevent machine downtime and thanks to the filling fluid solution it can withstand up to 315°C of process temperature.

In addition, with PLd and SIL2 approvals, the ILW series is the best solution for "functional safety" applications.

MAIN FEATURES

- Pressure ranges from:
0-17 to 0-1000 bar / 0-250 to 0-15000 psi
- Accuracy: < ±0.25% FS (H); < ±0.5% FS (M)
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- 117-7 PH corrugated diaphragm with GTP+ coating other types available on request
- Oil filling meets FDA requirements CFR 178.3620 and CFR 172.878
- Stem material: 17-4 PH
- IO-Link output, ready for "Industry 4.0"
- Rangeability: 3:1
- PLd and SIL2 approvals for Functional safety
- Autozero function
- Auxiliary information over IO-Link protocol

GTP+ (advanced protection)

Coating with high resistance against corrosion, abrasion and high temperature

AUTOZERO FUNCTION

All signal variations in the absence of pressure can be eliminated by using the Autozero function.

This Autozero function is activated via IO-Link command.

The procedure is allowed only at zero pressure.

TECHNICAL SPECIFICATIONS


Accuracy (1)	H <±0.25% FS (100...1000 bar) M <±0.5% FS (17...1000 bar)
Measurement range	0..17 to 0..1000bar 0..250 to 0..15000psi
Maximum overpressure (without degrading performances)	2 x FS 1.5 x FS above 700bar/10000psi
Measurement principle	Extensimetric (Thick film)
Power supply	18-30 Vdc
Maximum current absorption (*)	1 W (1.2 W with relay optional)
Zero offset	<±0.25% FS
Zero adjustment	"Autozero" function
Communication interface	IO-Link
Cycle time	2 msec
IO-Link version	1.1
Transmission type	COM2 (38.4 kBaud)
Profile	Smart sensor generic profile
SIO Mode	Yes
Required class for Master port	A
Pressure process data resolution	14 bit
Analog output resolution	16 bit
Temperature process data resolution	16 bit
Rangeability	3:1 (analogue output opt.)
Calibration signal	80% FS
Power supply polarity reverse protection	YES
Compensated temperature range housing	0...+85°C
Operating temperature range housing	-30...+85°C
Storage temperature range housing	-40...+125°C
Thermal drift in compensated range: Zero / Calibration / Sensibility	< 0.02% FS/°C
Diaphragm maximum temperature	315°C / 600°F
Zero drift due to change in process temperature (zero)	< 4 bar/100°C / < 30 psi/100°F
Integral temperature (optional)	Accuracy T/C type J
Protection degree (5-pole female connector)	IP65 with suitable mating connector

FS = Full scale output: (1) BFSI method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability (according to IEC 62828-2).

(*) does not take into account absorption on DO in SIO mode (limited to 200mA)


MECHANICAL DIMENSIONS

ILW0

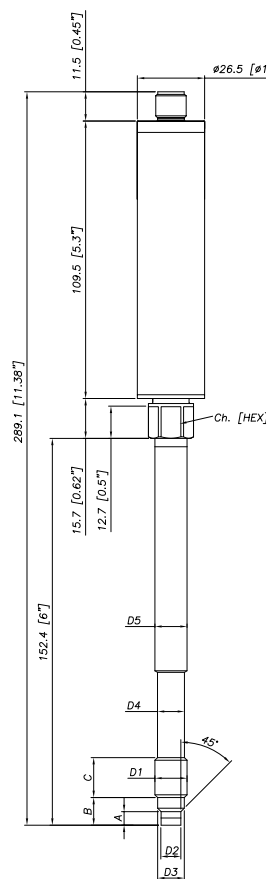


D1	1/2 - 20UNF
D2	Ø7.8 -0.05 [Ø0.31" -0.002]
D3	Ø10.5 -0.025 [Ø0.41" -0.001]
D4	Ø10.67 [Ø0.42"]
D5	Ø12.7 [Ø0.5"]
A	5.56 -0.26 [0.22" -0.01]
B	11.2 [0.44"]
C	15.74 [0.62"]
Ch [Hex]	16 [5/8"]

ILW1

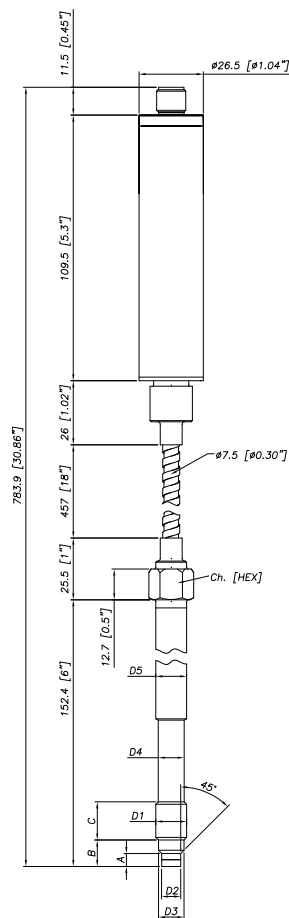

D1	M18x1.5
D2	Ø10 -0.05 [Ø0.394" -0.002]
D3	Ø16 -0.08 [Ø0.63" -0.003]
D4	Ø16 -0.4 [Ø0.63" -0.016]
D5	Ø18 [Ø0.71"]
A	6 -0.26 [0.24" -0.01]
B	14.8 -0.4 [0.58" -0.016]
C	19 [0.75"]
Ch [Hex]	19 [3/4"]

ILW3

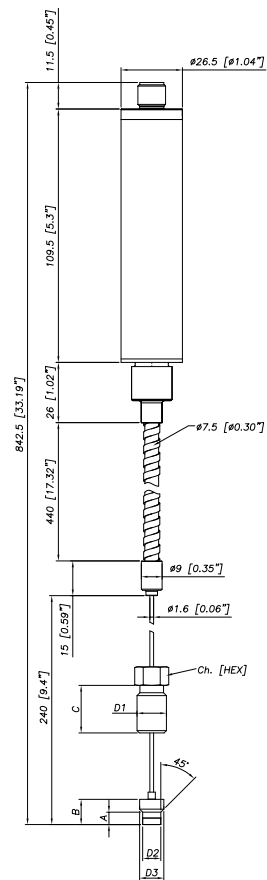

NOTE : dimensions refer to rigid stem length option “4” (153 mm – 6”)
WARNING : For installation use a maximum tightening torque of 56 Nm (500 in-lb)

SELF DIAGNOSTICS (for SIL/PL certified models only)

Below the conditions detected by the sensor self-diagnostics:

- Cut cable / device non connected / broken power supply, output <3.6 mA/0.25 V
- Pin detachment, output >20.6 mA/10.8 V
- Pressure above 200% of the span, output >20.6 mA/10.8 V
- Voltage monitor in case of overvoltage/undervoltage/voltage variation in the electronics, output <3.6 mA/0.25 V
- Program sequence error, output <3.6 mA/0.25 V
- Overtemperature on the electronics, output <3.6 mA/0.25 V
- Error on the primary element output or on the first amplification stage, output <3.6 mA/0.25 V

OPTIONAL RELAY OUTPUT FOR EXCESS PRESSURE PROTECTION (for SIL/PL certified models only)

Safety relay characteristics:

- Activation threshold to be defined in the order code
- Rated carry current: 1A
- Rated voltage: 24Vdc \pm 20%
- Switch accuracy: 2 x sensor accuracy
- Hysteresis: 2% FS

SUPPLY	OUTPUT	RELAY STATUS
OFF	-	OPEN
ON	< X%FS	CLOSED
ON	> X%FS	OPEN
ON	under range	OPEN
ON	over range	OPEN

NAMUR COMPLIANCE (for SIL/PL certified models only)

The sensors are tested according to Namur NE21 recommendations.

The same compatibility is valid for the NE43 Namur recommendation with the following sensor behaviour in case of breakdown:

- Cut cable: breakdown information as the signal is <3.6 mA/0.25 V
 - Device not connected: breakdown information as the signal is <3.6 mA/0.25 V
 - Broken power-supply: breakdown information as the signal is <3.6 mA/0.25 V
- or in case of performance problems:
- most common failures on primary sensors: the signal goes to >20.6 mA/>10.8 V

Note: in all the remaining situations, the output signal is always included between 3.6 mA/0.25 V and 20.6 mA/10.8 V.



Recommendation: the error level set by the customer (e.g. maximum pressure value) has to be inside the nominal range

AUTOZERO FUNCTION


The Autozero function is activated by IO-Link command.

All zero drift caused by temperature change on the tip can be removed by using this function.

This autozero procedure must be performed at zero pressure only, when the sensor is completely installed on the system.

See operating manual for complete Autozero Function explanation

ELECTRICAL CONNECTIONS

5 pin M12x1 connector 	M12x1 5 pin Connector	IO-LINK Output	Relay Output Option	Analogue Output Option
	1	V+	V+	V+
	2	DO (*)	Relay Conctat 1	DO (*)
	3	V-	V-	V-
	4	IO-LINK	IO-LINK	IO-LINK
	5	N.C.	Relay Conctat 2	Analogue Output

(*) DO = digital output only active in SIO mode

ACCESSORIES

Connectors

5-pin female connector	CON031
5-pin female connector, angle 90°	CON041

IO-Link connection cables

IO-Link and Safety output Y splitter cable, 5 pins M12 connector	CAV500
2m unshielded cable, with M12 female 5 pins straight connector and M12 male 5 pins straight connector	CAV501
5m unshielded cable, with M12 female 5 pins straight connector and M12 male 5 pins straight connector	CAV502
10m unshielded cable, with M12 female 5 pins straight connector and M12 male 5 pins straight connector	CAV503

Master IO-Link

Gefran has analyzed and then qualified the main masters on the market that meet the IEC 61131-9 standard relating to the digital communication interface IO-Link 1.1, and therefore compatible with ILM, ILW, ILK and ILI transducers.

Note: For further information (ordering codes, technical specifications, etc.) please contact Gefran or write to: info@gefran.com.

Accessories

Mounting bracket	SF18
Dummy plug for 1/2-20UNF	SC12
Dummy plug for M18x1.5	SC18
Drill kit for 1/2-20UNF	KF12
Drill kit for M18x1.5	KF18
Cleaning kit for 1/2-20UNF	CT12
Cleaning kit for M18x1.5	CT18

ORDER CODE

ILW				0 00 0 X 000 X 00																																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: left; padding: 2px;">VERSION</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">Rigid rod</td> <td style="text-align: center; padding: 2px;">0</td> </tr> <tr> <td style="padding: 2px;">Rigid + flexible rod</td> <td style="text-align: center; padding: 2px;">1</td> </tr> <tr> <td style="padding: 2px;">Exposed capillary</td> <td style="text-align: center; padding: 2px;">3*</td> </tr> </tbody> </table>				VERSION		Rigid rod	0	Rigid + flexible rod	1	Exposed capillary	3*	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: left; padding: 2px;">Output Relay Version (*)</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="padding: 2px;">(activation threshold):</td> </tr> <tr> <td colspan="2" style="padding: 2px;">X = no relay B = 80% FS</td> </tr> <tr> <td colspan="2" style="padding: 2px;">A = 70% FS C = 90% FS</td> </tr> </tbody> </table>				Output Relay Version (*)		(activation threshold):		X = no relay B = 80% FS		A = 70% FS C = 90% FS																																											
VERSION																																																																	
Rigid rod	0																																																																
Rigid + flexible rod	1																																																																
Exposed capillary	3*																																																																
Output Relay Version (*)																																																																	
(activation threshold):																																																																	
X = no relay B = 80% FS																																																																	
A = 70% FS C = 90% FS																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: left; padding: 2px;">CONNECTOR</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">M12x1 (5 pin)</td> <td style="text-align: center; padding: 2px;">5</td> </tr> </tbody> </table>				CONNECTOR		M12x1 (5 pin)	5	<table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="text-align: center; padding: 2px;">00</td> <td style="padding: 2px;">No analogue output</td> </tr> <tr> <td style="text-align: center; padding: 2px;">01</td> <td style="padding: 2px;">4-20 mA output (*)(**)(***)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">02</td> <td style="padding: 2px;">0.5-10.5 V output (*)(**)</td> </tr> </tbody> </table>				00	No analogue output	01	4-20 mA output (*)(**)(***)	02	0.5-10.5 V output (*)(**)																																																
CONNECTOR																																																																	
M12x1 (5 pin)	5																																																																
00	No analogue output																																																																
01	4-20 mA output (*)(**)(***)																																																																
02	0.5-10.5 V output (*)(**)																																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: left; padding: 2px;">ACCURACY CLASS</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">0.25% FS (ranges ≥ 100 bar/1500 psi)</td> <td style="text-align: center; padding: 2px;">H</td> </tr> <tr> <td style="padding: 2px;">0.5% FS</td> <td style="text-align: center; padding: 2px;">M</td> </tr> </tbody> </table>				ACCURACY CLASS		0.25% FS (ranges ≥ 100 bar/1500 psi)	H	0.5% FS	M	<table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="text-align: center; padding: 2px;">0</td> <td style="padding: 2px;">Standard</td> </tr> <tr> <td style="text-align: center; padding: 2px;">T</td> <td style="padding: 2px;">Integral temperature</td> </tr> </tbody> </table>				0	Standard	T	Integral temperature																																																
ACCURACY CLASS																																																																	
0.25% FS (ranges ≥ 100 bar/1500 psi)	H																																																																
0.5% FS	M																																																																
0	Standard																																																																
T	Integral temperature																																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4" style="text-align: left; padding: 2px;">MEASUREMENT RANGE</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">bar</td> <td></td> <td style="padding: 2px;">psi</td> <td></td> </tr> <tr> <td style="text-align: center; padding: 2px;">17</td> <td style="padding: 2px;">B17U</td> <td style="text-align: center; padding: 2px;">250</td> <td style="padding: 2px;">P25D</td> </tr> <tr> <td style="text-align: center; padding: 2px;">35</td> <td style="padding: 2px;">B35U</td> <td style="text-align: center; padding: 2px;">500</td> <td style="padding: 2px;">P05C</td> </tr> <tr> <td style="text-align: center; padding: 2px;">50</td> <td style="padding: 2px;">B05D</td> <td style="text-align: center; padding: 2px;">750</td> <td style="padding: 2px;">P75D</td> </tr> <tr> <td style="text-align: center; padding: 2px;">70</td> <td style="padding: 2px;">B07D</td> <td style="text-align: center; padding: 2px;">1000</td> <td style="padding: 2px;">P01M</td> </tr> <tr> <td style="text-align: center; padding: 2px;">100</td> <td style="padding: 2px;">B01C</td> <td style="text-align: center; padding: 2px;">1500</td> <td style="padding: 2px;">P15C</td> </tr> <tr> <td style="text-align: center; padding: 2px;">200</td> <td style="padding: 2px;">B02C</td> <td style="text-align: center; padding: 2px;">3000</td> <td style="padding: 2px;">P03M</td> </tr> <tr> <td style="text-align: center; padding: 2px;">350</td> <td style="padding: 2px;">B35D</td> <td style="text-align: center; padding: 2px;">5000</td> <td style="padding: 2px;">P05M</td> </tr> <tr> <td style="text-align: center; padding: 2px;">500</td> <td style="padding: 2px;">B05C</td> <td style="text-align: center; padding: 2px;">7500</td> <td style="padding: 2px;">P75C</td> </tr> <tr> <td style="text-align: center; padding: 2px;">700</td> <td style="padding: 2px;">B07C</td> <td style="text-align: center; padding: 2px;">10000</td> <td style="padding: 2px;">P10M</td> </tr> <tr> <td style="text-align: center; padding: 2px;">1000</td> <td style="padding: 2px;">B01M</td> <td style="text-align: center; padding: 2px;">15000</td> <td style="padding: 2px;">P15M</td> </tr> </tbody> </table>				MEASUREMENT RANGE				bar		psi		17	B17U	250	P25D	35	B35U	500	P05C	50	B05D	750	P75D	70	B07D	1000	P01M	100	B01C	1500	P15C	200	B02C	3000	P03M	350	B35D	5000	P05M	500	B05C	7500	P75C	700	B07C	10000	P10M	1000	B01M	15000	P15M	<table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="text-align: center; padding: 2px;">P</td> <td style="padding: 2px;">Performance Level='d'/SIL2</td> </tr> <tr> <td style="text-align: center; padding: 2px;">0</td> <td style="padding: 2px;">Standard IO-Link</td> </tr> </tbody> </table>				P	Performance Level='d'/SIL2	0	Standard IO-Link						
MEASUREMENT RANGE																																																																	
bar		psi																																																															
17	B17U	250	P25D																																																														
35	B35U	500	P05C																																																														
50	B05D	750	P75D																																																														
70	B07D	1000	P01M																																																														
100	B01C	1500	P15C																																																														
200	B02C	3000	P03M																																																														
350	B35D	5000	P05M																																																														
500	B05C	7500	P75C																																																														
700	B07C	10000	P10M																																																														
1000	B01M	15000	P15M																																																														
P	Performance Level='d'/SIL2																																																																
0	Standard IO-Link																																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4" style="text-align: left; padding: 2px;">THREADING</th> </tr> </thead> <tbody> <tr> <td colspan="4" style="padding: 2px;">Standard</td> </tr> <tr> <td style="padding: 2px;">1/2 - 20 UNF</td> <td colspan="3" style="text-align: center; padding: 2px;">1</td> </tr> <tr> <td style="padding: 2px;">M18 x 1.5</td> <td colspan="3" style="text-align: center; padding: 2px;">4</td> </tr> </tbody> </table>				THREADING				Standard				1/2 - 20 UNF	1			M18 x 1.5	4			<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3" style="text-align: left; padding: 2px;">FLEXIBLE ROD LENGTH</th> </tr> </thead> <tbody> <tr> <td colspan="3" style="padding: 2px;">(mm/inches)</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Standard (ILW0)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">0</td> <td colspan="2" style="padding: 2px;">none</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Standard (ILW1)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">D</td> <td style="padding: 2px;">457mm</td> <td style="padding: 2px;">18"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">E</td> <td style="padding: 2px;">610mm</td> <td style="padding: 2px;">24"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">F</td> <td style="padding: 2px;">760mm</td> <td style="padding: 2px;">30"</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Standard (ILW3)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">L</td> <td style="padding: 2px;">711mm</td> <td style="padding: 2px;">28"</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Available on request</td> </tr> <tr> <td style="text-align: center; padding: 2px;">A</td> <td style="padding: 2px;">76mm</td> <td style="padding: 2px;">3"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">B</td> <td style="padding: 2px;">152mm</td> <td style="padding: 2px;">6"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">C</td> <td style="padding: 2px;">300mm</td> <td style="padding: 2px;">12"</td> </tr> </tbody> </table>				FLEXIBLE ROD LENGTH			(mm/inches)			Standard (ILW0)			0	none		Standard (ILW1)			D	457mm	18"	E	610mm	24"	F	760mm	30"	Standard (ILW3)			L	711mm	28"	Available on request			A	76mm	3"	B	152mm	6"	C	300mm	12"
THREADING																																																																	
Standard																																																																	
1/2 - 20 UNF	1																																																																
M18 x 1.5	4																																																																
FLEXIBLE ROD LENGTH																																																																	
(mm/inches)																																																																	
Standard (ILW0)																																																																	
0	none																																																																
Standard (ILW1)																																																																	
D	457mm	18"																																																															
E	610mm	24"																																																															
F	760mm	30"																																																															
Standard (ILW3)																																																																	
L	711mm	28"																																																															
Available on request																																																																	
A	76mm	3"																																																															
B	152mm	6"																																																															
C	300mm	12"																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3" style="text-align: left; padding: 2px;">RIGID ROD LENGTH</th> </tr> </thead> <tbody> <tr> <td colspan="3" style="padding: 2px;">(mm/inches)</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Standard (ILW0, ILW1)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">4</td> <td style="padding: 2px;">153mm</td> <td style="padding: 2px;">6"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">5</td> <td style="padding: 2px;">318mm</td> <td style="padding: 2px;">12.5"</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Standard (ILW3)</td> </tr> <tr> <td style="text-align: center; padding: 2px;">0</td> <td colspan="2" style="padding: 2px;">none</td> </tr> <tr> <td colspan="3" style="padding: 2px;">Available on request</td> </tr> </tbody> </table>				RIGID ROD LENGTH			(mm/inches)			Standard (ILW0, ILW1)			4	153mm	6"	5	318mm	12.5"	Standard (ILW3)			0	none		Available on request																																								
RIGID ROD LENGTH																																																																	
(mm/inches)																																																																	
Standard (ILW0, ILW1)																																																																	
4	153mm	6"																																																															
5	318mm	12.5"																																																															
Standard (ILW3)																																																																	
0	none																																																																
Available on request																																																																	

Example

ILW1-5-M-B07C-1-4-D-P T000C000X00

Melt pressure transducer, IO-Link output, 5-pin connector, 1/2-20 UNF threading,
700 bar pressure range, 0.5% accuracy, 153 mm (6") rigid rod, 457 mm (18") flexible rod;
Performance Level=d/SIL2, integral temperature,
relay option with 90%FS threshold.

Sensors are manufactured in compliance with:

- EMC directive
- RoHS directive
- machinery directive

Electrical installation requirements and Conformity certificate are available on our web site: www.gefran.com

GEFRAN reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN spa
via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) - ITALIA
tel. 0309888.1 - fax. 0309839063
Internet: <http://www.gefran.com>

GEFRAN

DTS ILW 12-2019 ENG