




Main features


- Temperature limits: - 40 ... + 400° C
- Tolerance: UNI 7937, IEC 751 standards:
 - ± 0.15° C a 0° C for class A (1/2 DIN)
 - ± 0.30° C a 0° C for class B (1 DIN)
 - ± 0.10° C a 0° C for 1/3 DIN class
- Compact mineral insulated (MgO) resistance thermometer element (Pt100 at 0°C) and continuous metal sheath

MODELS


TRMCP

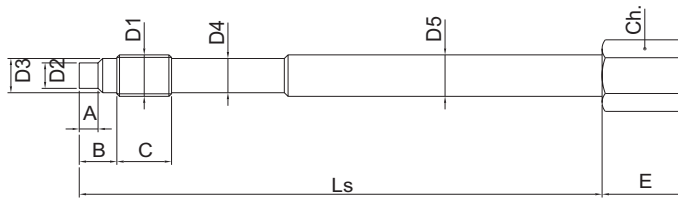


TRMCC

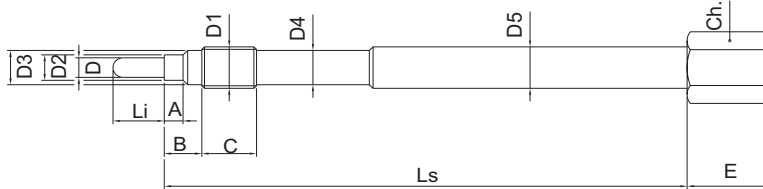

TRMCE

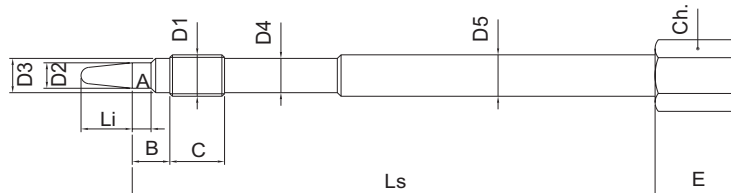

TRMGF

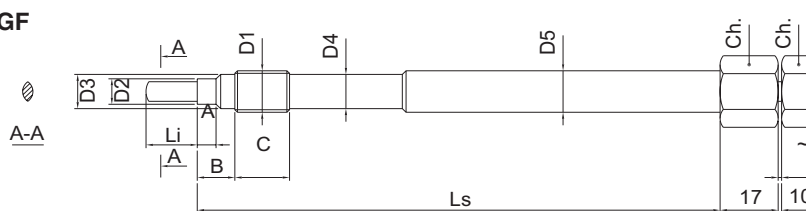

D1	D	D2	D3	D4	D5	CH	A	B	C	Ls	E	L1
M 18 x 1,5	7	10	16	16	17,8	19	6	14	20	50-90-153	17/25	Immersion length
1/2" - 20UNF	6	7,8	10,5	10,5	12,7	17/19	5,5	11	16	50-90-153	17/25	Immersion length

