## GEFRAN

## **MELT PRESSURE TRANSMITTERS**

## **ME SERIES**

Output 4...20mA



The ME series of Gefran, are pressure transmitters for using in High temperature environment.

The main characteristic of this series is the capability to read temperature of the media up to 400°C.

The constructive principle is based on the hydraulic trasmission of the pressure.

The fluid-filled system assures the temperature stability. The phisical measure is transformed in a electrical measure by means the strain-gauge technology.

#### **MAIN FEATURES**

- Pressure ranges from:
   0-35 to 0-2000 bar / 0-500 to 0-30000 psi
- Accuracy: < ±0.25% FSO (H); < ±0.5% FSO (M)
- Fluid-filled system for temperature stability
- Mercury filling volume: ME0 (30mm³); ME1, ME2, ME3 (40mm³)
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- Autozero function on board / external option
- Drift Autocompensation function (SP version)
- Standard diaphragm is 15-5 PH stainless steel with GTP coating
- 17-7 PH corrugated diaphragm with GTP coating for ranges below 100 bar-1500 psi

GTP (advanced protection) Coating with high resistance against corrosion, abrasion and high temperature

## **AUTOZERO FUNCTION**

All signal variations in the absence of pressure can be eliminated by using the Autozero function.

This function is activated by closing a magnetic contact located on the transmitter housing.

The procedure is permitted only with pressure at zero.

# AUTO-COMPENSATES INFLUENCE OF MELT TEMPERATURE

Thanks to internal self-compensation, the MSP series transmitter cancels the effect of pressure signal variation caused by variation of Melt temperature.


This reduces at the minimum the read error caused by heating of the filling fluid (typical of all sensors built with "filled" technology).

### **TECHNICAL SPECIFICATIONS**

Accuracy (1)	<b>H</b> <±0.25%FSO (1002000 bar) <b>M</b> <±0.5%FSO (352000 bar)
Resolution	Infinite
Measurement range	035 to 02000bar 0500 to 030000psi
Maximum overpressure	2 x FS
(without degrading performances)	1.5 x FS above 1000bar/15000psi
Measurement principle	Extensimetric
Power supply	1030Vdc
Maximum current absorption	32mA
Insulation resistance (at 50Vdc)	>1000 MOhm
Output signal Full Scale (FSO)	20mA
Zero balance (tollerance ± 0.25% FSO)	4mA
Zero signals adjustment (tollerance ± 0.25% FSO)	"Autozero" function
Span adjustment within ± 5% FSO	See Manual
Maximum allowed load	See diagram
Response time (1090% FSO)	~ 1ms
Output noise (RMS 10-400Hz)	< 0.025% FSO
Calibration signal	80% FSO
Output short circuit ingress and reverse polarity protection	YES
Compensed temperature range	0+85°C
Operating temperature range	-30+105°C
Storage temperature range	-40+125°C
Thermal drift in compesated range: Zero / Calibration / Sensibility	< 0.02% FSO/°C
Diaphragm maximum temperature	400°C / 750°F
Zero drift due to change in process temperature (zero)	< 0.02 bar/°C
Zero drift temperature for Autocompensated version (SP) within the temperature range 20°C-400°C inclusive the drift temperature of the housing	< 0.003 bar/°C 100 ≤ p < 500 bar 0.0014 %FS/°C p ≥ 500 bar
Standard material in contact with process medium	Diaphragm:  • 15-5 PH with GTP coating  • 17-7 PH corrugated diaphragm with GTP coating for ranges <100 bar (1500psi)  Stem:  • 17-4 PH
Thermocouple (model ME2)	STD: type "J" (isolated junction)
Protection degree (with 6-pole female connector)	IP65
FSO = Full scale output : (1) BFSI method (Besi	t Eit Straight Line); includes combined


FSO = Full scale output: (1) BFSL method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability.

### **MECHANICAL DIMENSIONS**

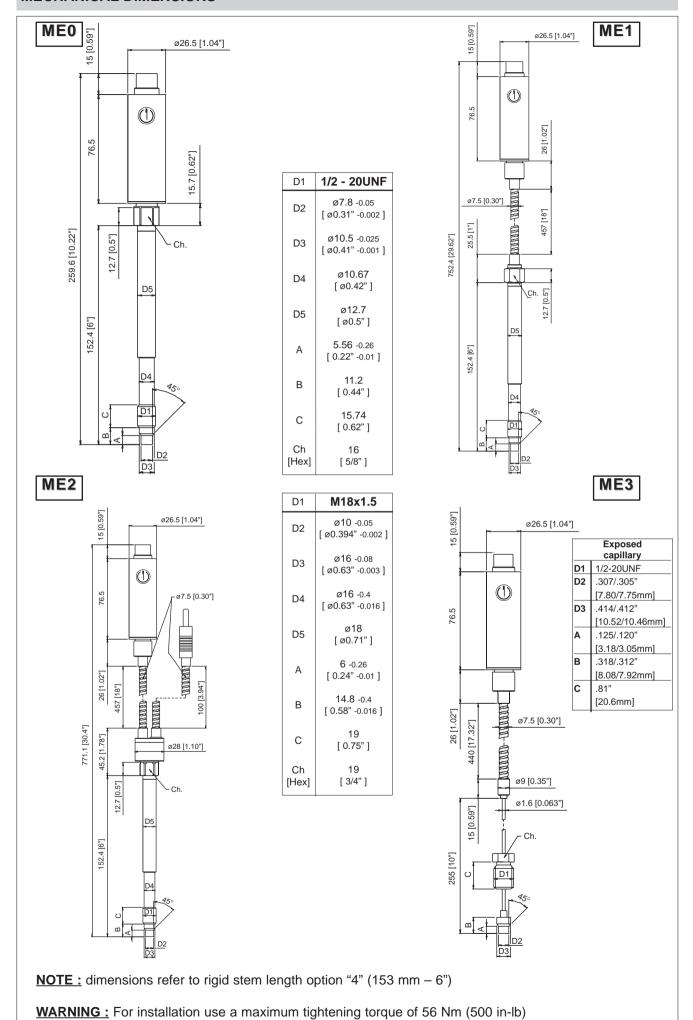

#### **ELECTRICAL CONNECTIONS**

## **CURRENT OUTPUT (4...20mA, two wires)**

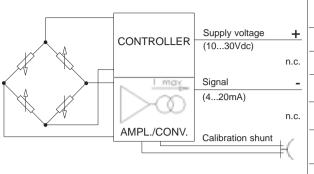

#### **MAGNETIC AUTOZERO**

6-pin	8-pin
Α	В
С	А
В	D
D	С
E-F	E-F
	G - H

Shield drain wire is tied to

connector via cable clamp

## Supply voltage + (10...30Vdc) n.c. Signal (4...20mA)

Autozero

n.c.

#### **EXTERNAL** AUTOZERO


	6-pin	8-pin
-	Α	В
	С	Α
-	В	D
	D	С
	E-F	E-F
		G - H

6 pin connector VPT07RA10-6PT2 (PT02A-10-6P)



8 pin connector PC02E-12-8P Bendix

## **LOAD DIAGRAM**

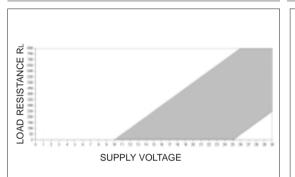


n.c

The diagram shows the optimum ratio between the load and supply voltage of the 4...20mA transmitter.

For a correct use, choose any combination of load resistance and supply voltage, in the shaded area.

## **AUTOZERO FUNCTION**

n.c.



The Autozero function is activated through a magnetic contact (external magnet supplied with the sensor). See the manual for a complete Autozero function explanation.

Wire

Red

Black

White


Green Blue

Orange

#### **ACCESSORIES**

#### Connectors 6-pin mating connector (IP65 protection degree) **CON300** 8-pin mating connector **CON307** Cable color code **Extension cables** Conn. 6-pin connector with 8m (25ft) cable C08WLS 6-pin connector with 15m (50ft) cable **C15WLS** В C25WLS 6-pin connector with 25m (75ft) cable С 6-pin connector with 30m (100ft) cable C30WLS D Е Other lengths consult factory **Accessories** Mounting bracket **SF18** Dummy plug for 1/2-20UNF **SC12** Dummy plug for M18x1.5 **SC18** Drill kit for 1/2-20UNF KF12 Drill kit for M18x1.5 **KF18** Cleaning kit for 1/2-20UNF **CT12** Cleaning kit for M18x1.5 **CT18** Fixing pen clip **PKIT309** Autozero pen PKIT312 Thermocouple for ME2 model Type "J" (153mm - 6" stem) **TTER 601**

#### **ORDER CODE**

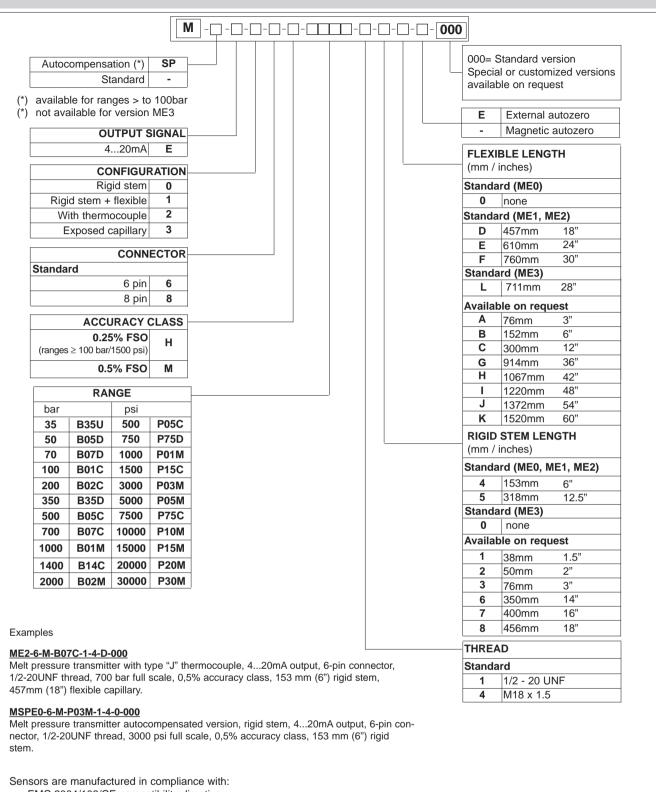

- EMC 2004/108/CE compatibility directive
- RoHS 2002/95/CE directive

Electrical installation requirements and Conformity certificate are available on our web site: www.gefran.com



The Melt pressure transmitter/transducer are available with GOST-R certification. The request of this version must be specified on the order.

**GEFRAN** reserves the right to make any kind of design or functional modification at any moment without prior notice.



GEFRAN spa via Sebina, 74 25050 PROVAGLIO D'ISEO (BS) - ITALIA tel. 0309888.1 - fax. 0309839063 Internet: http://www.gefran.com